



## SmartNode™ 4950

### Multi-Port T1/E1/PRI VoIP Enterprise Gateway Router

Connect legacy PBX systems to state-of-the-art IP telephony. Combining a VoIP Gateway with an IP Router, the SmartNode™ 4950 adds QoS and VPN security, making it the ideal solution for VoIP and Unified Communications.

#### Up to 120 VoIP calls...

with up to four T1/E1/PRI ports and dual Gigabit Ethernet ports.

#### Unified Communications Agent™

Provides any-to-any multi-path switching with VoIP and data survivability, VoIP-over-VPN security with AES/DES strong encryption, Internet Key Exchange (IKE), and SIP Registrar.

#### Secure Toll-Quality VOIP

Patton's DownStreamQoS™ and Voice-over-VPN with adaptive traffic management and shaping for maximum voice quality and secure voice communication.

#### Transparent Telephony Features

Complex number manipulation and mapping for seamless integration with existing infrastructures, CLIP, CLIR, hold, transfer and much more.

#### G.SHDSL.bis Broadband Access

Optional 4-wire 11.4 Mbps G.SHDSL.bis WAN interface.

#### Optional High Precision Clock

Delivers DECT PBX interoperability with reliable fax performance.

#### SmartNode™ Awards

- **2010 Internet Telephony Product of the Year:** SmartNode™ 5400
- **2009 Internet Telephony Product of the Year:** SmartNode™ 4400 Series
- **2008 Internet Telephony Product of the Year:** SmartNode™ 4961
- **2007 Internet Telephony Product of the Year:** SmartNode™ S-DTA
- **2006 Internet Telephony Product of the Year:** SmartNode™ 4960
- **2005 Internet Telephony Product of the Year:** SmartNode™ 4630

**A**s enterprises move toward Unified Communications, the SmartNode™ 4950 offers a smooth transition to IP telephony by connecting your traditional phone equipment to next-generation VoIP networks and services.

**Preserve your investment** in legacy phone equipment while taking the next step toward Unified Communications. Least-cost call routing in Patton's proven SmartNode™ VoIP solutions optimizes monthly expenses while flexible dialed-numbering plans maintain established business processes.

**The Unified Communications Agent™ (UCA)** provides any-to-any multi-path switching (simultaneous SIP, H.323, ISDN, and POTS calls with routing and conversion between TDM/PSTN and IP/Ethernet networks—plus T.38 and SuperG3 FAX) combined with dial-backup and IP-link redundancy for VoIP and data survivability. Provide VoIP-over-VPN security with voice encryption via IPsec with AES/DES strong encryption and automated keying via Internet Key Exchange (IKE), plus SIP Registrar for presence/reachability.


**Advanced router functionality** includes DownStreamQoS™ delivering the clear advantage of secure, uninterrupted voice-and-data communication.

**Connect to any** switch, PBX or data network with up to four T1/E1/PRI ports for up to 120 simultaneous calls using SIP, T1, E1 or PRI signaling. Like every SmartNode, the SN4950 supports all the industry-standard CODECS, delivering toll-quality voice on every call.


**Ensure business continuity.** Combining PSTN breakout with IP-link redundancy, SmartNode™ ensures voice-and-data survivability for reliable enterprise-class communications.

**Additional options** include Patton's unique high-precision clock enabling first-line IP telephony services in demanding ISDN and DECT environments with reliable FAX and modem performance. The SN4950 also offers optional built-in 11.4 Mbps broadband access via 4-wire G.SHDSL.bis that reduces hardware costs, simplifies network architecture and streamlines service and deployment.

Visit [www.patton.com](http://www.patton.com) for more information.

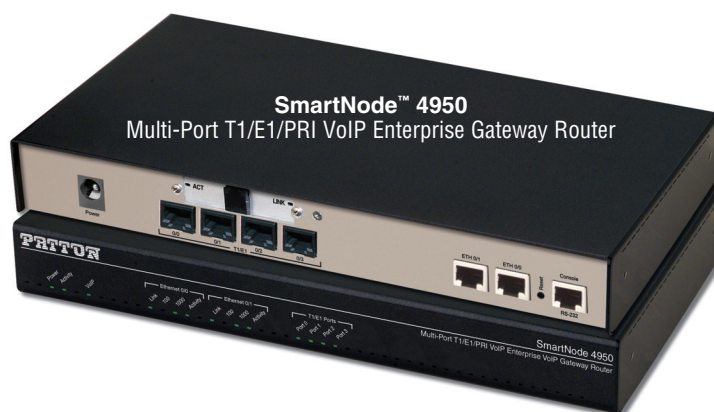

## Application Diagram—Convert Legacy PBX to VoIP

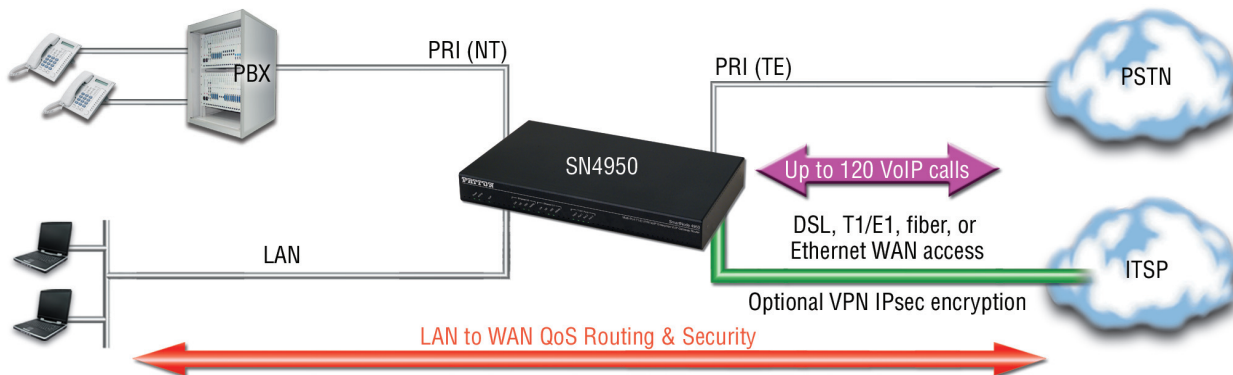

## Specifications\*

### Voice Connectivity

Up to four software selectable T1/E1/PRI ports (NE/TE) • Signaling support (ISDN DSS-1, NI-2, Q.SIG, CAS Robbed bit loop and ground start, E&M, immediate, wink, double wink) • SIPv2 & MGCP/UA, H.323v4 • ISDN AOC/ECT • ISDN speech, audio & data (Fax Gr 4, UDI 64, RDI64) • ISDN supplementary services

### Broadband Access

4-wire G.SHDSL ITU-T G991.2, Annex A, B, F, G • Up to 11.4 Mbps • PPOE • 8PVCs, each UBR, CBR or VBR-rt selectable • I.610 OAM F4/F5 support • G.994.1 (G.hs)

### Voice Processing

Codec G.711 a-law/mu-law, G.723, G.729ab, G.726, G.727, T.38 fax relay (9.6 k, 14.4 k) • G.711 transparent fax and bypass • 128 ms echo cancellation

### Call Routing and Services

Regular expression call routing and manipulation • number blocking • short-dialing • digit collection, distribution and hunt groups

### Data Interfaces

Dual 10/100/1000 TX Ethernet Ports • Autosensing • Auto-MDI • Full-duplex

### IP Routing

Complete IP access router • DHCP Client & Server • Packet fragmentation • Static

firewall, NAT, NAPT RFC 1631 access control lists • DMZ port

### IP Quality of Service

Voice priority • DownStreamQoS™ • traffic management, shaping policing • IEEE 802.1p, TOS, DiffServ labeling • IEEE 802.1Q, VLAN tag insertion/deletion 4,096

### Management

Web/HTTP, CLI with local console & remote Telnet access • TFTP configuration & firmware loading • SNMP MIB II and product MIB • Secure autoprovisioning for firmware & unit/subscriber configuration • Built-in diagnostic tools (trace, debug, call generator)

### Power & Packaging

Desktop metal chassis

**Dimensions:** 11.0W x 1.5H x 7.0D in. (28.0W x 3.9H x 18.0D cm)

**Weight:** < 30 oz (850g)

**Internal Power:** 100-240VAC (50/60 Hz)

**Power Consumption** < 15W

### Operating Environment

**Operating temperature:** 32 to 104° F (0 to 40°C)

**Operating humidity:** up to 90%, non-condensing

### Compliance

EMC: EN55022 and EN5502 • Safety: EN 60950 • CE • FCC Part 15 Class A; Part 68; CS-03

\* Specifications subject to change without notice.

## Ordering Info

### SN4950 SmartNode T1/E1/PRI VoIP IAD: Hi-Capacity, 2x GigEthernet, External UI power

**SN4950/1E15V/EUI:** 1 E1/T1, 15 VoIP channels, upgradeable to 30 calls

**SN4950/1E24V/EUI:** 1 E1/T1, 24 VoIP channels, upgradeable to 30 calls

**SN4950/1E30V/EUI:** 1 E1/T1, 30 VoIP channels, non-upgradeable

**SN4950/4E15V/EUI:** 4 E1/T1, 15 VoIP channels, upgradeable to 60 channels

**SN4950/4E24V/EUI:** 4 E1/T1, 24 VoIP channels, upgradeable to 60 channels

**SN4950/4E30V/EUI:** 4 E1/T1, 30 VoIP channels, upgradeable to 60 channels

**SN4950/4E48V/EUI:** 4 E1/T1, 48 VoIP channels, upgradeable to 60 channels

**SN4950/4E60V/EUI:** 4 E1/T1, 60 VoIP channels, non-upgradeable

**SN4950/4E96V/EUI:** 4 E1/T1, 96 VoIP channels, field upgradeable to 120 channels

**SN4950/4E120V/EUI:** 4 E1/T1, 120 VoIP channels

Note: For complete ordering list, contact [sales@patton.com](mailto:sales@patton.com)

### Options & Accessories

**SNSW-49V6:** 6 channel Voice Upgrade Key for SN4960 VoIP IADs. Software expansion for additional voice channels.

**SNSW-VPN2:** Software option for IPsec VPN, including DES/3DES and AES encryption, IKE and Voice-Over-VPN

**SNSW-QSIG2:** Support for ISDN Q.SIG.

\*For G.SHDSL option: add 2GS in SKU (ex: SN4950/4E30V2GS/EUI)

\*For High-Precision option: use SN4951 in SKU (ex: SN4951/4E30V/EUI)

WAN Options include G.SHDSL, X.21, Frame Relay, PPP, and ML-PPP over E1/T1  
Relay Option: Between port 0/0 and port 0/1

PE-Inalp Networks Private Ltd

An Associate of

**PATTON**  
Electronics Co., USA

Old No. 14 and New No.6,  
Brahadambal Road,  
Nungambakkam High Road  
Chennai: 600 034, India  
Phone **+91 44 45490395/6/7**  
Fax **+91 44 4549.0394**  
Email **sales@patton.co.in**  
Web **www.patton.co.in**

07MSN4950-DS1

Patton is a registered trademark and the terms SmartNode, DownStreamQoS, and SessionRouter are trademarks of Patton Electronics Company in the United States and other countries.

Patton-Inalp Networks AG

**PATTON**  
inalp networks

Meriedweg 7  
CH-3172 Niederwangen  
Switzerland  
Phone **+41 (31) 985 25 25**  
Fax **+41 (31) 985 25 26**  
E-mail **sales@inalp.com**  
Web **www.inalp.com**

Patton Electronics Co.

**PATTON**  
Electronics Co.

7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879  
USA  
Phone **+1 301 975 1000**  
Fax **+1 301 869 9293**  
E-mail **sales@patton.com**  
Web **www.patton.com**