

iBoot-G2S

Reboots the failed system to get you back online fast!

Easiest Way to Minimize Downtime

Minimize downtime to keep your critical systems running and your customers happy. iBoot provides automatic and web controlled power switching to quickly get you back online fast.

This model has a built-in 10/100 network switch that makes installation in those hard to reach locations a breeze. With this product, there is no need for a separate cable run or router port to get the cost savings of remote reboot. If you are looking for a basic product with a limited amount of features, please check out the **iBoot-G2**.

Control one or many iBoots with a single sign-on using the free iBoot Cloud Service. Just log in and you are instantly in control of as many locations as necessary.

Top Features:

Simple Web Browser Operation

Just point your browser to the iBoot, login and you are one click away from bringing that failed system back to life

All setup functions are easy to configure from the browser

Free Cloud Service

Manage an unlimited number of iBoots from a single login

Eliminate port forwarding and dynamic DNS issues

More secure with outbound connections only

2 Port Network Switch Built in



10/100 switch eliminates extra cables and make installation easier

Includes 2 customizable external I/O to expand to 3 outlets or for outlet control

Plus

USB port for direct serial control and programmable shutdown prior to auto power reboot

Includes additional autoping triggers

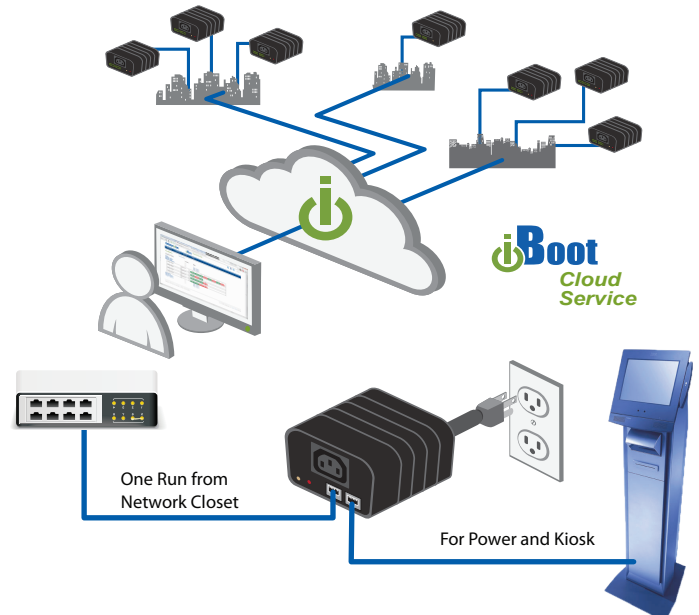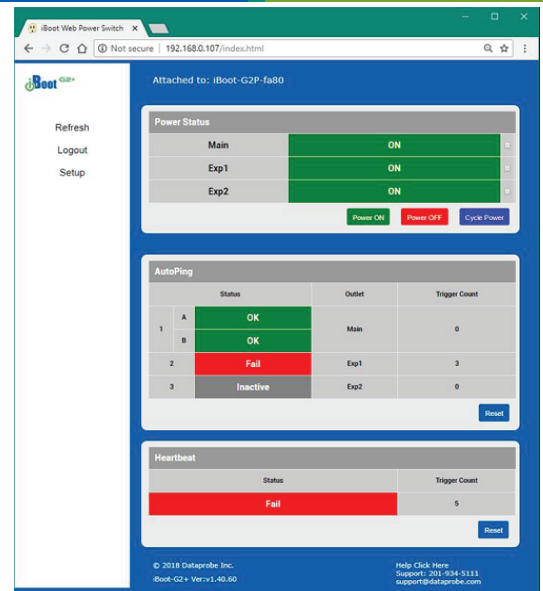

Additional Features

| | |
|-------------------------------------|---|
| Automatic System Restoral | AutoPing detects network or equipment outage and takes immediate action to restore your network or device. Real time scheduling to have a fresh reboot each morning or minimize power waste at night. |
| IP Addressed - 10/100 Base-T | Use on any Ethernet IP Network, (public or private) Supports DHCP and alternate ports for Web Access. |
| Easy Integration | Control iBoot-G2S directly from your software application, web page or network management scheme. Sample code in several languages are provided. Configuration tools make it easy to deploy a large number of units across your organization. |
| 110/220 VAC Operation | Auto ranging power input. Deploy iBoot-G2S anywhere in the world. iBoot-G2S uses IEC320 Connectors and includes line and extension cords for North America. |
| 12 AMP Switching | Current for most Servers, Routers, Kiosks, etc. (10 Amps at 220 VAC) |
| External I/O | Contact Closure or Open Collector |

Specifications

Subject to Change Without Notice

| | |
|-------------------------|---|
| Physical: | H x W x D: 2.0" x 3.2" x 4.2" (60mm x 82mm x107mm) Operating Temperature 0 to 50 Deg. C |
| Power: | 105 - 240 VAC Auto Ranging |
| Power Switching: | 12 Amps at 105-125 VAC 10 Amps at 210-240 VAC Includes cables for North America (NEMA 5-15) |
| Network: | 2 Port 10/100 Base-T, Autosensing Uplink/Downlink Cat 5 Cable Included 6'/2m long |
| Serial: | USB Mini-B Com Port, 9600 8 N 1, cable included |
| Reliability: | MTBF 320,000 Hours Operating Cycles 10,000,000 Mechanical. 100,000 Maximum Load |
| Security: | Dual Password Protected, User and Admin and Custom Web Port |
| Compliance: | RoHS/WEEE FCC Part 15 Class B UL/cUL UL60950 Listed I.T.E File No. E225914 CE Directives 89/336/EEC, 92/31/EEC and 93/68/EEC |

Other iBoot Models

iBoot-G2+

Expandable to 3 outlets and additional features

iBoot-G2

Equipped with all of the essential basic features

iBoot-DC

DC Powered Version
5 - 48VDC up to 12 Amps

iBoot-I0

Contact or Voltage Level
Control of AC Power

iBoot-PoE

Extenders and Injectors with auto-reboot.
802.3at/af and passive up to 90 watts.

For More Information

www.dataprobe.com/iboot-g2s/

Phone: 201-934-9944

Fax: 201-934-9090

Email: sales@dataprobe.com

Website: dataprobe.com

Follow Us:



dataprobe
Making Every Network More Reliable